

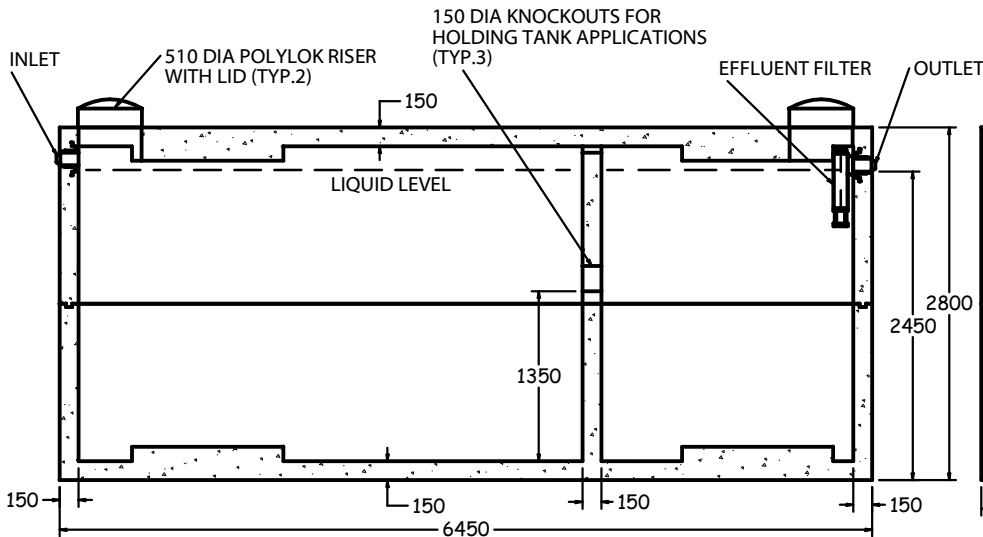
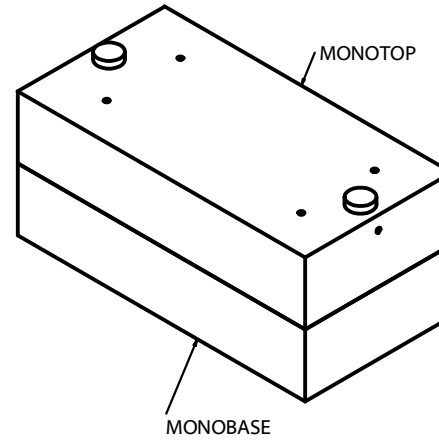


TOP VIEW  
1:60

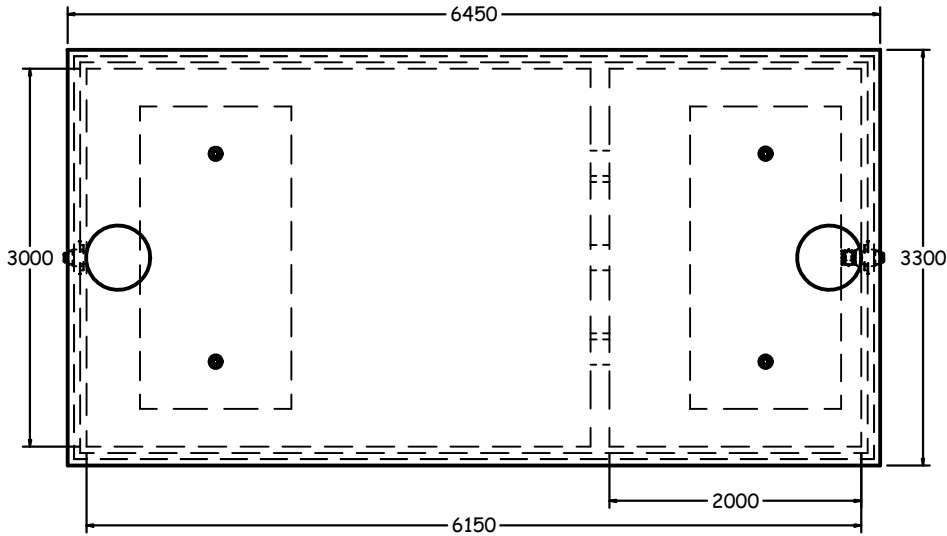

SIDE SECTION  
1:60

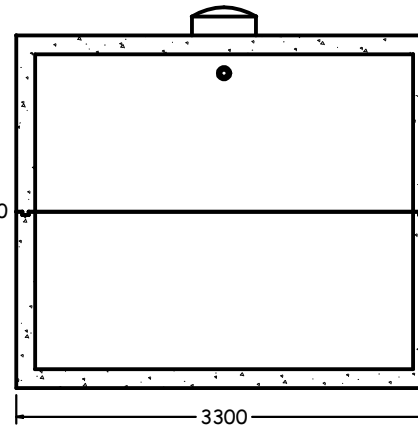

END SECTION  
1:60

## 8800 GALLON SEPTIC TANK (ST3000)

### SPECIFICATIONS

ALL DIMENSIONS IN MILLIMETRES.

#### NOM. CAPACITY:

8800 GALLONS (40000 LITRES) TO INVERT OF OUTLET.  
91.2 GALLONS/IN. VERTICALLY.  
16327 LITRES/M VERTICALLY.

#### CONCRETE:

45 MPa @ 28 DAYS,  
6% AIR ENTRAINMENT IN ACCORDANCE  
WITH CSA A23.1 MOD-M90

#### REINFORCING:

IN ACCORDANCE WITH CSA A23.1-M90  
ALL REINFORCING STEEL HAS 30mm MIN. COVER.  
REINFORCING DETAILS AVAILABLE UPON REQUEST.

#### BAFFLES:

PVC PLASTIC LOCKED INTO CONCRETE.

#### INLET & OUTLET:

POLYLOK TYPE III HIGH PRESSURE PIPE SEALS FOR  
76 (3") OR 102 (4") PIPE.

#### WEIGHT:

MONOBASE	-19000 KG
MONOTOP	-19000 KG

#### NOTES:

PRODUCT MANUFACTURED TO C.H.B.D.C. LOADING.

MANUFACTURED IN ACCORDANCE WITH OPSS 1351.

ALL PIECES INCLUDE SWIFT LIFT LIFTING ANCHORS.

VARIABLE OPENINGS IN MONOTOP  
AVAILABLE UPON REQUEST.

MAX. BURIAL DEPTH: 610mm.  
DEEP BURIAL DEPTHS AVAILABLE UPON REQUEST.

REFER TO INSTALLATION GUIDELINES FOR TANKS.



1645 SYDENHAM RD.  
KINGSTON, ONT.

PHONE:  
(800) 223-0012  
1-613-546-6683

[www.anchorconcrete.com](http://www.anchorconcrete.com)