# 600mmx1200mm DITCH INLET WITH 2400mm DIA. FLAT CAP




TOP VIEW




FRONT VIEW

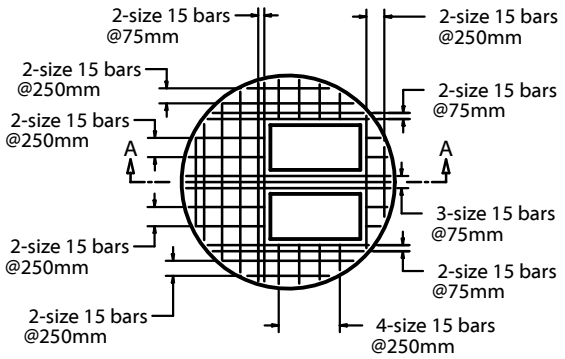


SECTION A-A

**TYPE A**
**(OPSD 706.030)**

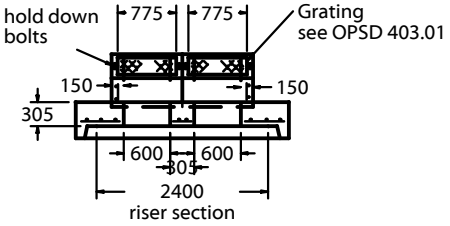


| SLOPE OF GRATING | DIMENSIONS | |
|---|---|---|
| | A | B |
| 2:1 | 1365 | 55 |
| 3:1 | 1285 | 95 |
| 4:1 | 1260 | 110 |
| 6:1 | 1240 | 55 |
| 8:1 | 1230 | 60 |
| 10:1 | 1225 | 60 |
| HOR | 1220 | 65 |

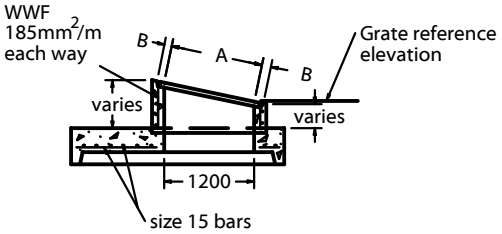**NOTES:**

**ALL DIMENSIONS IN MILLIMETRES.**

**IN ACCORDANCE WITH CSA A23.1-M90**
**ALL REINFORCING STEEL HAS 30mm MIN. COVER.**

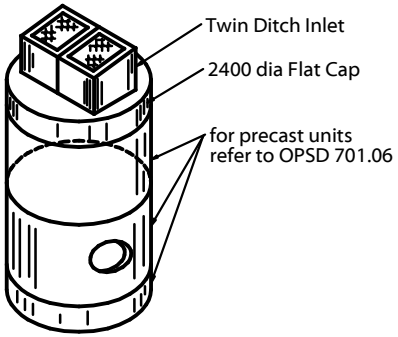**WHERE INLET IS PLACED ACROSS DITCH AND IS ACCESSIBLE TO VEHICULAR TRAFFIC, GRATING SLOPE IS TO BE 6:1 OR FLATTER.**




TOP VIEW




FRONT VIEW

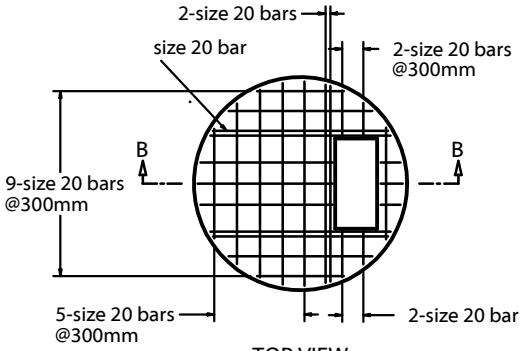


SECTION B-B

**TYPE B**
**(OPSD 706.031)**

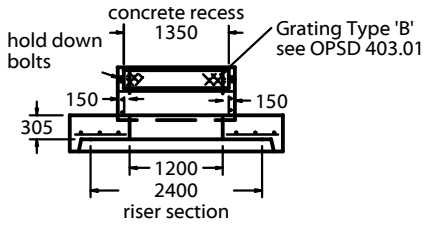


| SLOPE OF GRATING | DIMENSIONS | |
|---|---|---|
| | A | B |
| 2:1 | 675 | 50 |
| 3:1 | 645 | 65 |
| 4:1 | 625 | 75 |

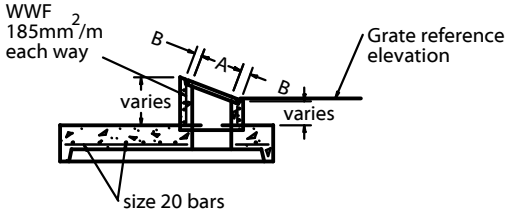
ANCHOR CONCRETE PRODUCTS

1645 SYDENHAM RD.
KINGSTON, ONT.

PHONE:
(800) 223-0012
1-613-546-6683

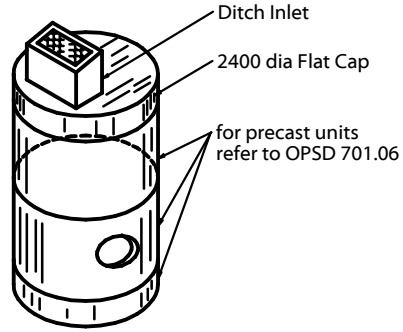www.anchorconcrete.com